

Tecnos Ferromica

IT - Smalto sintetico protettivo, perlaceo metallizzante ad effetto antichizzato per ferro e legno. TECNOS si applica facilmente e assicura una valida protezione del supporto contro gli agenti atmosferici, impreziosendo esteticamente i manufatti trattati. A base di resine sintetiche, contiene pigmenti ad eccellente resistenza alla luce ed all'invecchiamento atmosferico, solventi de aromatizzati ed inibitori di ruggine. Disponibile nei colori di cartella.

Strumenti applicativi: pennello - rullo

Diluizione: 5% acqua

Resa per mano: 8-10 m²/lt

Sovrapplicabile dopo: 24 h

EN - Synthetic protective enamel, Perly Metallizing with an antique effect for iron and wood. TECNOS can be easily applied and ensures a valid protection of the support against atmospheric agents, aesthetically embellishing the treated items. Based on synthetic resins, it contains pigments with excellent resistance to light and atmospheric aging, aromatized solvents and rust inhibitors. Available in color cards range.

Applications tools: brush - roller

Dilution: 5% turpentine

Yield for each coat: 8-10 m²/lt

Overpainted after: 24 h



COLORIFICIO CASATI S.p.A.

via Valpantena, 59/B

37142 Poiano (VR) · Italia


t +39 045 550 244

w casati.it · e casati@casati.it



TECNOS FERROMICA

Smalto ferro-micaceo a solvente
Solvent based ferromicaceous enamel

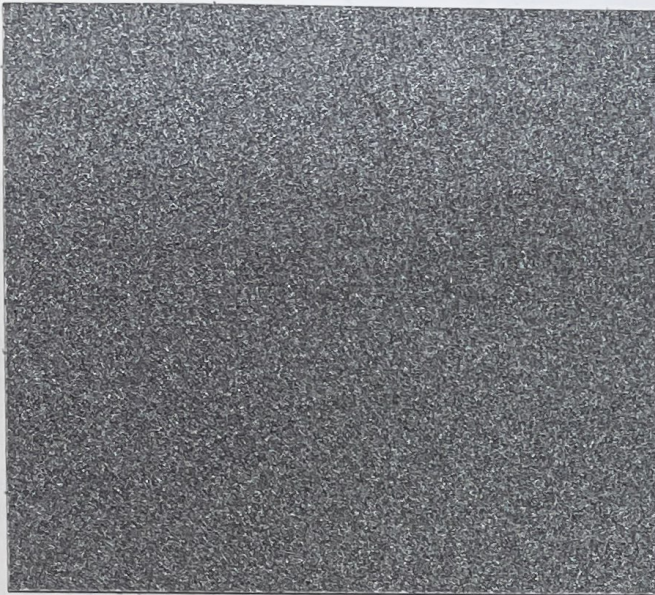

.100 BASE PURE 1



.200 BASE PURE 2



.615 Verde Scuro • Dark Green



.613 Verde • Green



.605 Brunito • Polished



.625 Marrone • Brown



.639 Testa Di Moro • Dark Brown



.610 Oro • Golden



.609 Alluminio • Aluminium



.638 Grigio Acciaio • Steel Gray



.602 Canna di Fucile • Banner



.608 Antracite (Ghisa) • Anthracite (Cast Iron)



.626 Nero • Black